


Fabrication of Drive Tractor Body

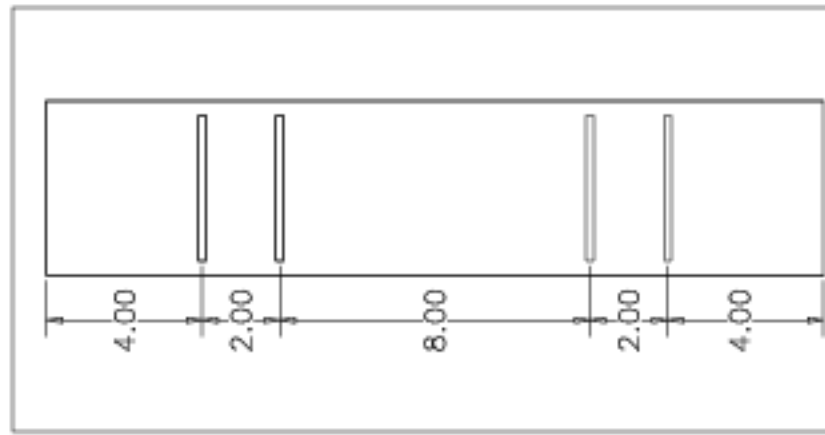

This part should be fabricated in such a way as to keep the top and bottom plates as flat and parallel as possible. Cylinders should be perpendicular to the top and bottom plates to within 1/16 inch. Tolerance is ±1/16 unless otherwise stated.

Tenn. State Univ.	
CASS 2-m AST Project	
08/05/97	AST-10-R07
J.A.E.	