Note: These covers are designed to protect the mirror during maintenance. The four ugly slots in the edges are for the hold-down fingers. The two halves are symmmetrical except for the clasp guide plates on one side only.

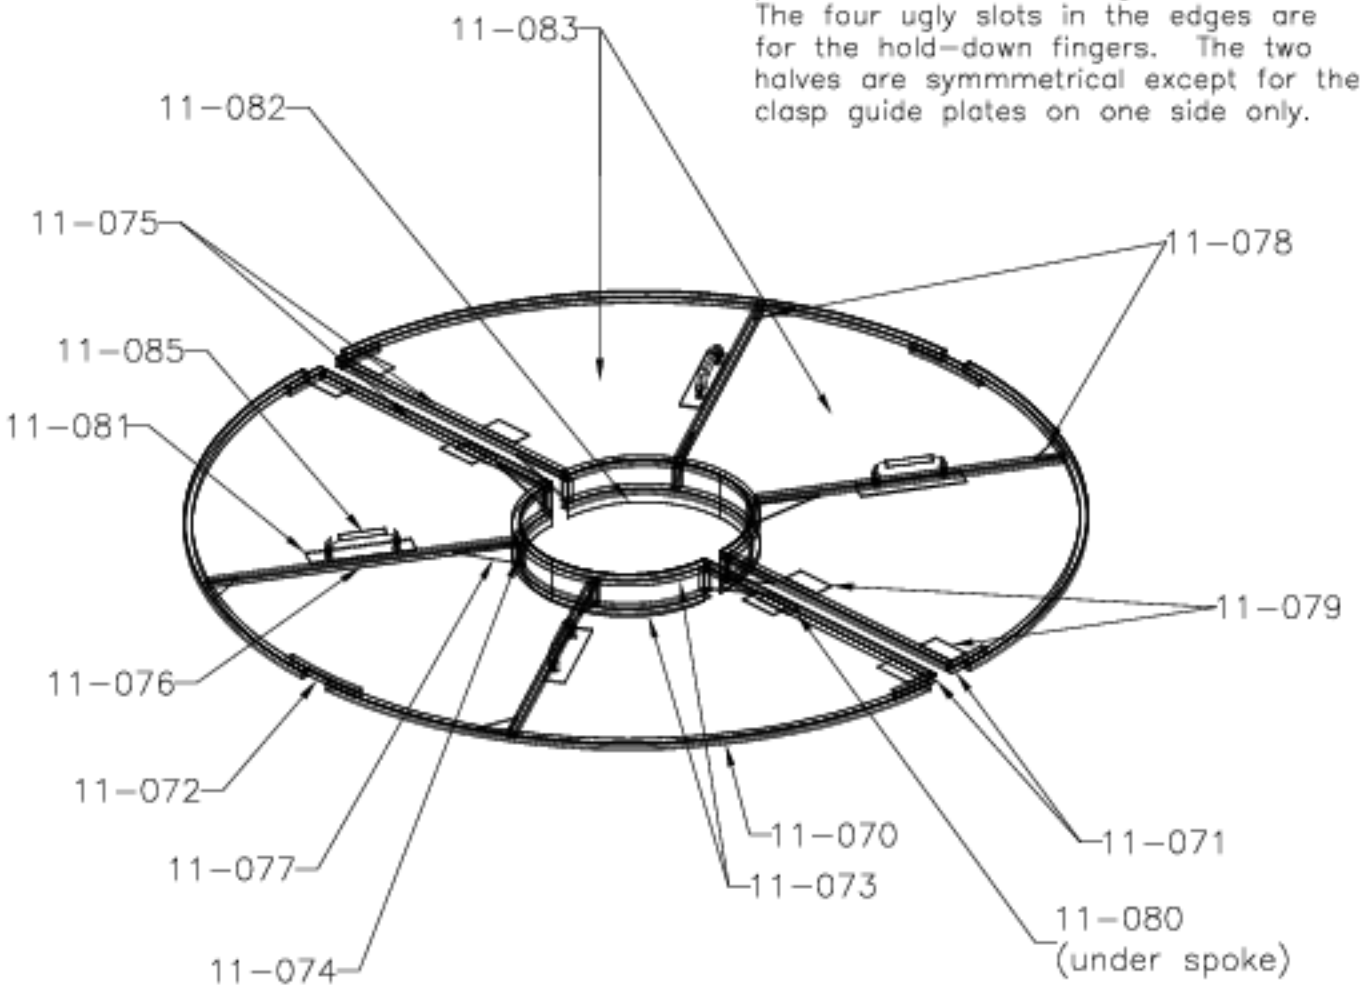

Primary Mirror Covers

No.	Qty.	Description
87	8	1/4-20 lock nut for 11-086 (stainless)
86	8	1/4-20x1 socket-hd cap screw (stainless)
85	4	Handle (provided by TSU) (Winco 26W164BBOK)
84	4	Clasps (not shown)
83	2	Top plate
82	2	Inside collar
81	4	Handle Stiffener
80	2	Clasp guide plate
79	8	Clasp-attachment stiffener
78	4	Outer-ring stiffener
77	8	Inner-ring stiffener
76	4	Spoke (no. 2)
75	4	Spoke (no. 1)
74	8	Inner-ring upright
73	4	Inner Ring
72	2	Outer ring span (no. 2)
71	4	Outer ring span (no. 1)
70	2	Outer Ring

Tenn. State Univ.

CASS 2-m AST Project

06/26/97
J.A.E.

AST-11-A10