

8

7

6

5

4

3

2

1

Bridge for Reimaging Mirror			
-----------------------------	--	--	--

Clearance for 1/4-20 screw, drilled from other side, counterbored 2.26 in. Both ends of part (symmetrical).

D

D

C


C

B

B

A

A

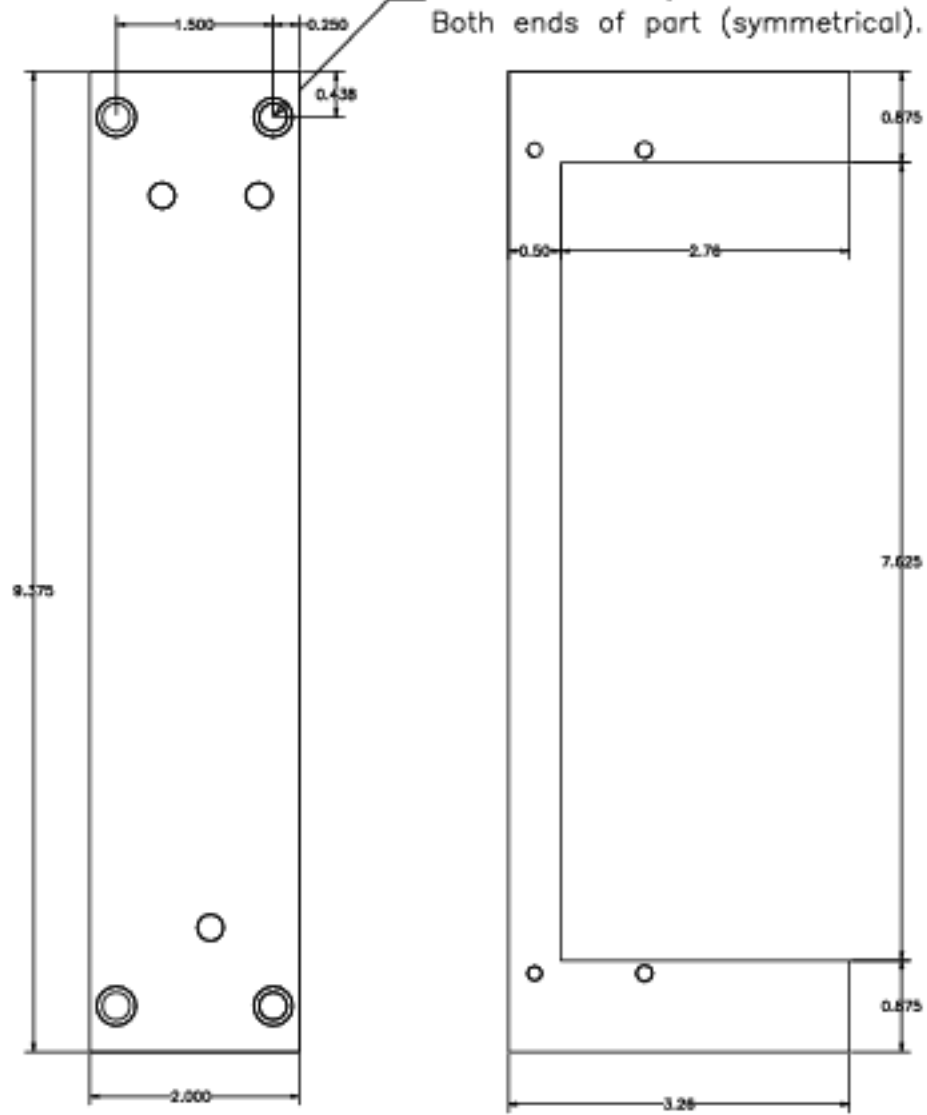

Part 21-030, Bridge (Mirror Support). Aluminum. See AST-21-R02 for details of screw holes. (1 reqd)

Tenn. State Univ.	
CASS 2-m AST Project	
02/05/01	AST-21-P08
J.A.E.	

8

7

6

5

4

3

2

1